


DOME D150

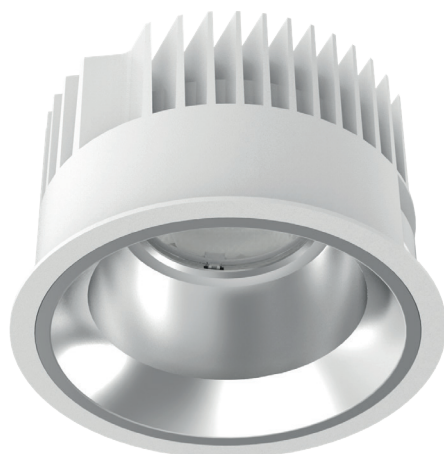

A high quality LED downlight, the Dome D150 is designed for efficiency and functionality with its sleek exterior aluminium powdered coat.

- A lumen outputs of 3000lm or 4000lm
- Colour Temperatures: 2700k - 3000k - 4000k
- Beam Angle: 18° to 70° Options
- Available with Dimming (/STD/DALI/MDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Reflector Options: Black, Grey or White
- IP Rating: IP54
- CRI80 as standard, CRI90 Available
- Aluminium Powder coating
- Dimensions: (Diameter x Height)
Ø160 x 100mm
- Cut-out Dimension: (Diameter) Ø150mm

| | | | | | |
|--|---|--|---|-------------------|--|
| Product | MID/DOME/D150 DOME Downlight | | | | |
| Light Source | LED | | | | |
| System Power Luminaire lumens (4000K) | /21W 3000lm | | /28W 4000lm | | |
| Size (cut out size) | Ø160mm x 100mm Ø150mm | | | | |
| Driver | /STD Non Dimming | /DALI DALI Dimming | /MDIM Mains Dimming | | /WI Wireless Control |
| Colour Temperature | /827 2700k | | /830 3000k | | /840 4000k |
| Reflector Colour | /BK Black | | /WH White | | /GR Grey |
| Beam Angle Options | /18D 18 Degree | /25D 25 Degree | /30D 30 Degree | /50D 50 Degree | /70D 70 Degree |
| Emergency | /ME3 Three hour maintained emergency | /ME3-ST Three hour maintained self test emergency | /ME3-PRO Three hour DALI addressable emergency | | /ME3-WI Three hour wireless addressable emergency |
| To Specify: DOME, D150, 21W, 4000k, 3000lm, DALI Dimming, 30 Degrees LED downlight finished white Part code: MID/DOME/D150/21W/3000lm/DALI/840/30D/WH | | | | | |

Reflector Options

