




MID130 Faceted Reflector

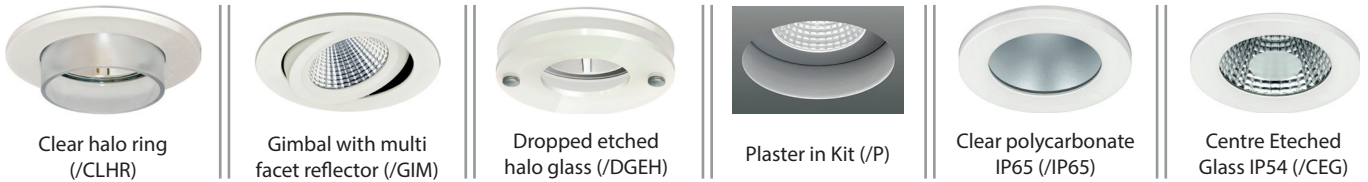

Exceptional energy efficiency with high performance. Ideal for office or commercial spaces where stunning effects are matched by high efficiency. IP54/IP65 attachments available.

- A range of lumen outputs from 1070-3300lm
- Colour Temperatures: 3000k - 4000k - Tunable White
- Colours: White, Chrome or Brushed Aluminium (/WH/CH/BA)
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Reflector Options: Faceted Reflector, Satin Etched or Highly Specular (/FR/SE/HS)
- IP Rating: IP20 as standard, IP54 and IP65 available
- Dimensions: (Diameter x Depth)
Ø130 x 99mm
- Cut-out Dimensions: (Diameter) Ø110mm

Product	MID130 Recessed MID130 Downlight			
Light Source	LED			
System Power <small>Luminaire lumens (4000K)</small>	/8W 1070lm	/13.8W 1814lm	/19.2W 2479lm	/27.8W 3300lm
Size Cut-out	Ø130mm 110mm			
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k		/840 4000k	/TWH Tunable White
Bezel Colour	/WH White		/CH Chrome	/BA Brushed Aluminium
Reflector Options	/FR Faceted Reflector		/SE Satin Etched	/HS Highly Specular
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour maintained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
To Specify: MID130 LED, 19.2W, 4000k, 2479lm LED downlight finished white supplied with faceted reflector and DALI and Wireless control gear. Part code: MID130/19.2W/2479lm/WI/DALI/840/WH/FR				

More Reflector Options

