
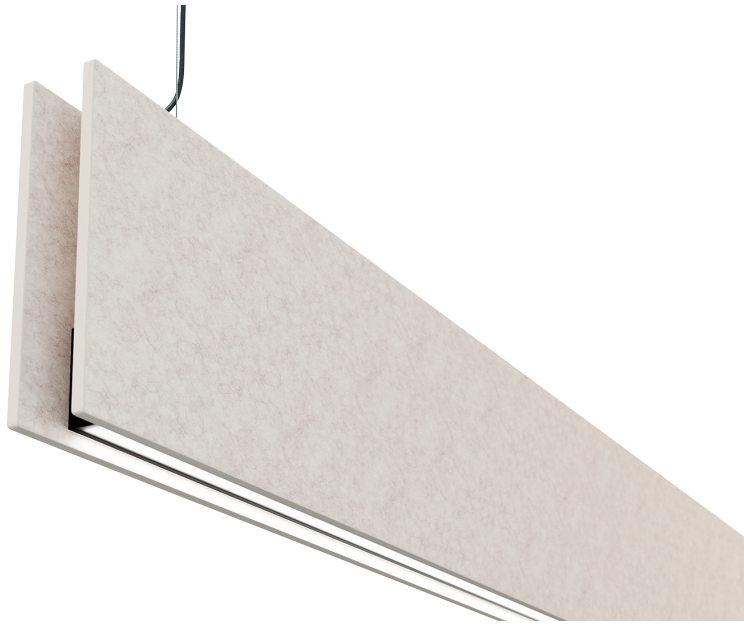


# SPACELINE50-ARC




**A linear acoustic pendant designed to add a harmonious and relaxed atmosphere, where acoustic damping is required.**

**The acoustic disc is available in a range of colours, utilising 65% recycled PET fibres.**

- A range of lumen outputs from 1100-3000lm/m
- Colour Temperatures: 3000k - 4000k - TWH
- Colour of Acoustic: White, Black, Light Grey, Grey, Red, Yellow or Orange (more colours available upon request)
- Available with Dimming (/STD/1-10V/DALI/SDIM)
- Wireless Emergency and Wireless Control (/WI) & (/ME3-WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Distribution: Direct or Direct/Indirect
- Mounting: Wire suspended
- Diffuser: Opal or Micro Prismatic Optic (/OP/MPO)
- CRI80 as standard, CRI90 Available
- Acoustic Class A
- Dimensions of Acoustics: (Length x Width x Height) 2400 x (12-24) x (150-300mm),
- Dimensions of Spaceline50: (Length x Width x Height) 2270 x 49 x 85mm,

Product	MIS/SPL50-ARC Suspended Linear LED with acoustic surrounding						
Light Source	LED						
System Power <small>Luminaire lumens (4000K)</small>	/10W/m 1100lm/m	/14W/m 1500lm/m	/17W/m 1900lm/m	/20W/m 2200lm/m	/24W/m 2600lm/m	/27W/m 3000lm/m	
Acoustic Height	/150 150mm		/200 200mm			/300 300mm	
Acoustic Width	/12A 12mm			/24A 24mm			
Driver	/STD Non-Dimming	/1-10V 1-10V Dimming		/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control	
Colour Temperature	/830 3000k		/840 4000k			/TWH Tunable White (2700k-5700k)	
Colour	/WH White	/BK Black	/GR Grey	/LGR Light Grey	/RD Cherry Red	/YL Yellow	/OR Orange
Diffuser Options	/OP Opal			/MPO Micro Prismatic Optic			
Emergency	/ME3 Three hour main- tained emergency		/ME3-ST Three hour maintained self test emergency		/ME3-PRO Three hour DALI addressable emergency		/ME3-WI Three hour Wireless addressable emergency
To Specify: SPACELINE50-ARC LED,10W/m, 1100lm/m, 4000k, a black 12mm thick 150mm tall Acoustic ,LED suspended supplied with DALI control gear, opal diffuser and direct distribution. Part code: MIS/SPL50-ARC/10W-m/1100lm-m/12A/150/DALI/840/BK/OP/DL							

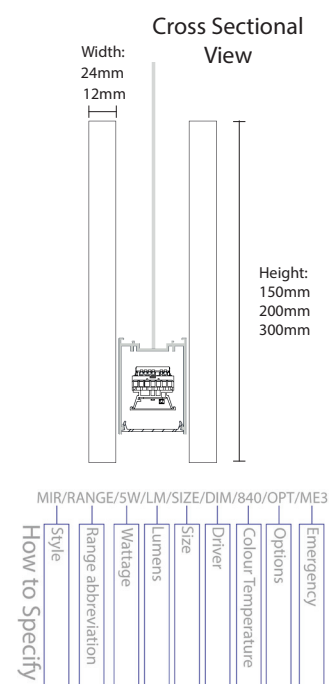

Surface & Suspended