



# WAFER-SQ RECESSED

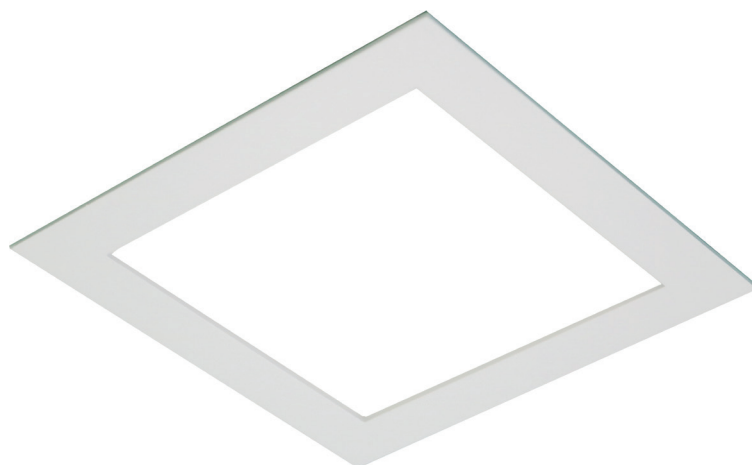

**The WAFER SQ is an architectural, square, ultra shallow LED solution. Recessed; ideal for restricted ceiling heights and voids.**

- A range of lumen outputs from 461-2174lm
- Colour Temperatures: 3000k - 4000k
- Colour: White (/WH)
- Available with Dimming (/STD/DALI/SDIM/MDIM)
- Wireless Control (/WI)
- Available with remote Emergency (/RME3 /RME3-ST /RME3-PRO)
- Wireless Emergency (/RME3-WI)
- Diffuser Options: Opal
- Dimensions: (Length x Width)  
See table below
- Shallow Depth: 19mm (depth without driver, driver depth may vary)
- Cut-out Dimensions: (Length x Width)  
See table below

Product	MIR/WAF-SQ Recessed WAFER Square				
Light Source	LED				
System Power Luminaire lumens (4000K)	/8W 461lm	/15W 982lm	/22W 1656lm	/30W 2174lm	
Size	108 x 108mm	168 x 168mm	220 x 220mm	300 x 300mm	
Cut-out	96 x 96mm	152 x 152mm	204 x 204mm	284 x 284mm	
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000k		/840 4000k		
Bezel Colour	/WH White				
Diffuser Options	/OP Opal Diffuser				
Emergency	/RME3 Remote three hour maintained emer- gency	/RME3-ST Remote three hour maintained self test emergency	/RME3-PRO Remote three hour DALI addressable emergency	/RME3-WI Remote three hour Wireless addressable emergency	
To Specify: WAFER LED, 15W, 4000k, 982lm LED downlight finished white and an opal diffuser, supplied with and standard non dimming Part code: MIR/WAF-SQ/15W/982lm/STD/840/WH/OP					



MIR/RANGE/SW/LM/SIZE/DIM/840/OPT/ME3

How to Specify

Style	Range abbreviation	Wattage	Lumens	Size	Driver	Colour Temperature	Options	Emergency
-------	--------------------	---------	--------	------	--------	--------------------	---------	-----------