


Plaster-in Profile (/P)

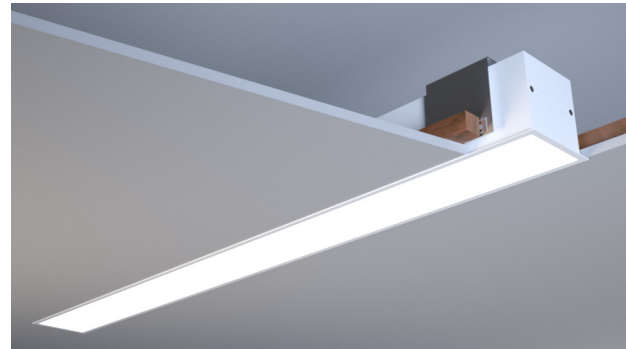

Trimmed Profile (/T)

- A high quality recessed extruded system ideally suited for modular or continuous runs.

- Colour Temperatures: 3000k - 4000k - 5000k - TWH
- Body: Aluminium Extrusion
- Body Options: Trimmed (114mm width) /Plaster-in (100mm width) (T/P)
- Diffuser: Polar White (/PW)
- Depth: 110mm
- Anodic Silver, white RAL9010 and White RAL 9016 as standard, other RAL colours available
- Available in continuous runs with aluminium infills. Please contact our technical department for further details
- Available with Dimming (/STD/DALI/SDIM)
- Available in Emergency (/ME3/ME3-ST/ME3-PRO)

Product	MIR/ALU100 Recessed LED Linear			
Lamp	LED			
Lamp Power Luminaire lumens (4000K)	/19W 1477lm	/26W 2170lm	/32.8W 2893lm	/41W 3616lm
Size	/6 600 x 100/114mm	/9 900 x 100/114mm	/12 1200 x 100/114mm	/15 1500 x 100/114mm
Driver	/STD Non Dimming	/DALI DALI Dimming		/SDIM Switch Dimming
Colour Temperature	/830 3000k	/840 4000k	/850 5000k	/TWH Tunable White
Colour	/SLV Anodic Silver		/WH White	
Diffuser Options	/PW Polar White Diffuser			
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour maintained self test emergency		/ME3-PRO Three hour DALI addressable emergency
To Specify: ALULINE 100 LED, trimmed, 32.8W, 4000k, 2893lm LED linear recessed finished white supplied complete with DALI control gear and polar white diffuser. Part code: MIR/ALU100/T/LED/12/32.8W/2893lm/12/DALI/840/WH/PW				

