




Plaster-in Profile (P)

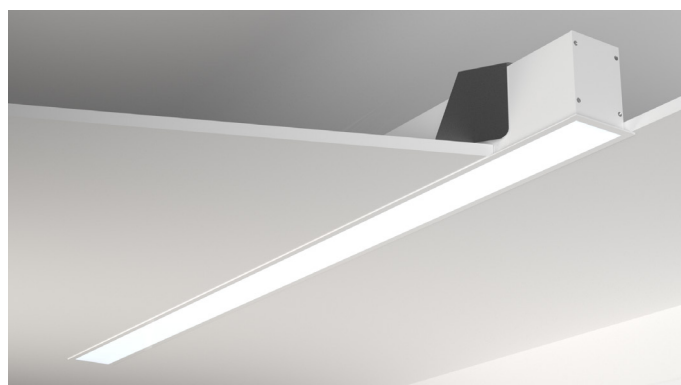

Trimmed Profile (T)

- ALULINE60 range provides an energy efficient and high output LED source in the style of a recessed linear luminaire. With a modern minimalist design the luminaire is suitable for a wide range of applications including offices, meeting rooms, circulation areas and receptions.

- A range of lumen outputs of 1415-7176lm
 - A range of standard sizes available from 578mm-3690mm
 - 5 year system warranty
 - Colour Temperatures: 3000k - 4000k - TWH
 - Available with Dimming (/STD/DALI/SDIM)
 - Available with Emergency (/ME3/ME3-ST/ME3-PRO)
 - Diffuser Options: Polar White / Microprism / Lumieo Panel (/PW/MPO/MPOLP)
 - Available in both trimmed and plaster-in options (/T/P)
 - Additional sizes, lumen and wattage options available
- Please contact our technical for further details

Product	MIR/ALU60 Recessed LED Linear			
Lamp	LED			
Lamp Power Luminaire lumens (4000K)	/18.7W 1415lm	/26.1W 2121lm	/33.3W 2829lm	/40.8W 3536lm
Length	/6 578mm	/9 859mm	/12 1139mm	/15 1420mm
Driver	/STD Non Dimming	/DALI DALI Dimming		/SDIM Switch Dimming
Colour Temperature	/830 3000k	/840 4000k		/TWH Tunable White
Colour	/WH White			
Diffuser Options	/PW Polar White	/MPO Micro Prismatic Optic		/MPOLP MPO with Lumieo
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour maintained self test emergency		/ME3-PRO Three hour DALI addressable emergency
To Specify: ALULINE60 LED, 40.8W, 4000k, 3536lm, 1420mm, LED modular recessed finished white supplied complete with DALI control gear and polar white diffuser. Part code: MIRALULINE60/LED/40.8W/3536lm/15/DALI/840/WH/PW				

