

FLATLINE WITH AIR HANDLING OPTIONS



FLATLINE123



FLATLINE 153 FRAME



**FLATLINE 153 FRAME
WITH AIR HANDLE**



FLATLINE 124 FRAME




**FLATLINE 143 FRAME
WITH AIR HANDLE**



**FLATLINE 124 FRAME
WITH AIR HANDLE**

These are some of the many bespoke flatline frame options we can provide to suit project requirements. Please contact the technical office for more details.

Product	MIR/FLT Recessed LED Modular			
Light Source	LED			
System Power Luminaire lumens (4000K)	/23.2W 3049lm	/31.6W 4017lm	/35.9W 4447lm	
Size	/295x1195mm Frame Size: 300 x 1200mm minimum - to suit project requirements.			
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming
Colour Temperature	/830 3000K	/840 4000K	/865 6500K	
Colour	To Suit Ceiling			
Diffuser Options	/UGR19 UGR19 Diffuser			
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour main- tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
Please contact technical for a personalised partcode				



MIR/RANGE/SW/LM/SIZE/DIM/840/OPT/ME3
Style
Range abbreviation
Wattage
Lumens
Size
Driver
Colour Temperature
Options
Emergency

How to Specify


PROJECTS BESPOKE AIR HANDLING EXAMPLES



69 Carter Lane



Flatline 1395 x 372mm in Air Handling Frame - SAS330 Ceiling, High Holborn

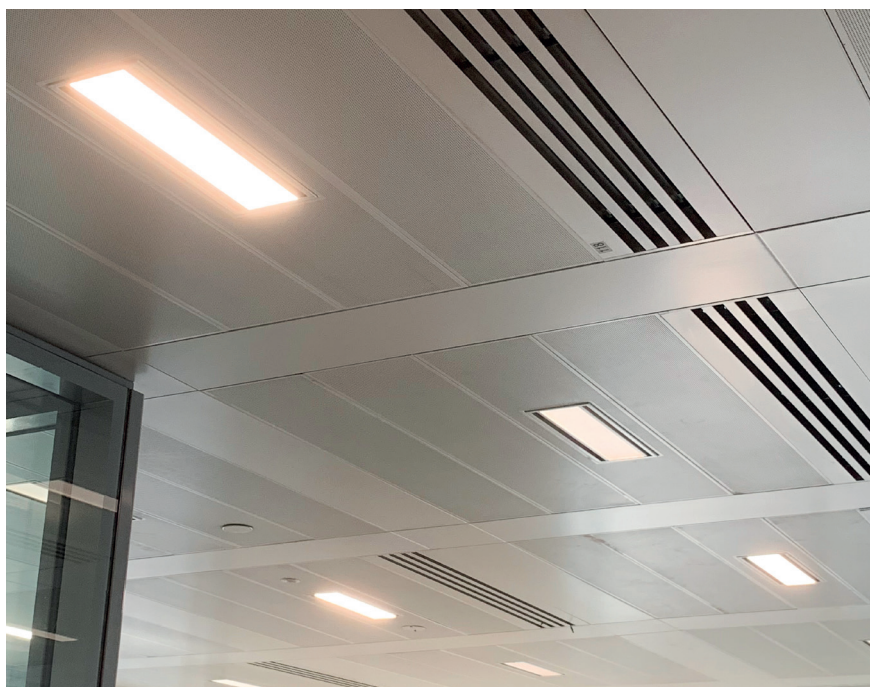

Deutsche Bank Winchester House



Whitebear Blenheim - 1348mm x 372mm