




FLED 84W & 121W

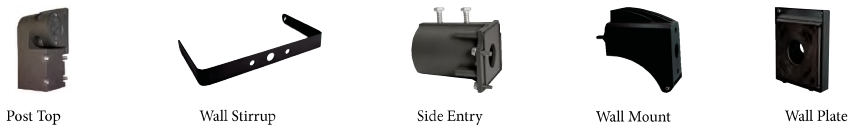

- The FLED 84W & 121W is an IP66 robust post top and wall mounted floodlight with a clear lens and black powdercoat finish.

- Providing a lumen output of 10,109-14,644lm
- Colour Temperature: 3000k - 4000k - 5000k
- Die cast aluminium housing and front frame. Integral heat sinking.
- Tempered clear flat glass lens.
- 76mm-102mmØ Post Top Spigot, Stirrup, Side Entry, Wall Mount, Wall Plate, Wall Swivel
- Rated IP66 - Photocell (/PC)
- Black powdercoat polyester finish over epoxy powder
- Dimensions: 381 x 340 x 92mm (L x W x D)

Product	MI/FLED IP66 LED Floodlight Luminaire					
Lamp	LED					
System Power Luminaire lumens (4000K)	/84W 10109lm			/121W 14644lm		
Size	381x 340 x 92mm					
Distribution	ASYM-1	ASYM-2	ASYM-3	ASYM-4	SYM-1	SPOT-1
Driver	/STD Non Dimming					
Colour Temperature	/830 3000k		/840 4000k		/850 5000k	
Mounting	/PT Post Top	/SE Side Entry	/WMST Wall Stirrup	/WMB Wall Mount	/WMP Wall Plate	/WMSW Wall Swivel
To Specify: FLOODLIGHT LED, 84W, 10109lm, 4000k, Asymmetric-1 Distribution with Wall Mounted luminaire supplied with complete with standard integral control gear. Part code: MI/FLED/84W/STD/840/ASYM-1/WMB						

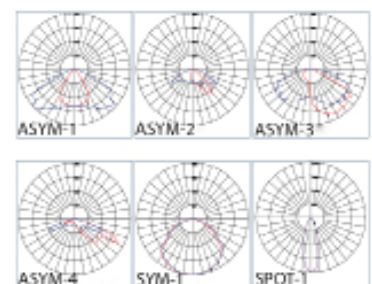

Exterior