
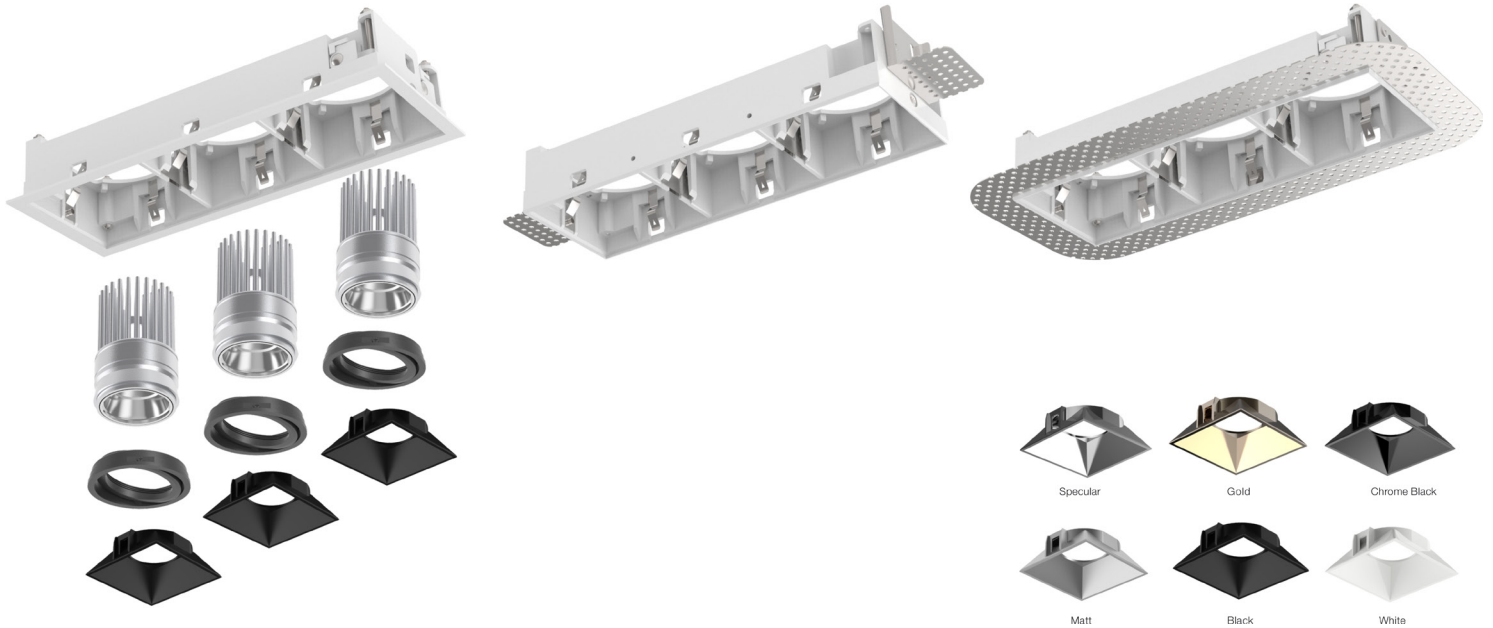


ILS CELL3



- The ILS CELL3 is a range of interchangeable trimmed and plaster-in bezel options.

The CELL3 has a range of reflector colours available.

The CELL3 can be used with the ILS 6W and 9W engine wattages.

- Colour Temperatures: 3000k - 4000k
- Beam Angles: 22°/ 36°/ 60° (/22D/36D/60D)
- Bezel Colour white and black as standard, range of reflectors available (/WH/BK)
- Available with Dimming (/STD/DALI/SDIM)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
 - Trimmed or plaster-in (/T/PI)
- Dimensions: Trimmed: 207 x 78mm
Plaster-in: 240 x 112mm
- Cut-Out Dimensions: Trimmed: 198 x 68mm
Plaster-in: 200 x 72mm
- Depth: ILS 6W: 72mm ILS 9W: 98mm
- Materials: Aluminium Housing
Polycarbonate reflector with aluminium coating

Product	MID/ILS/C3/T ILS Cell2 Trimmed	MID/ILS/C3/PI ILS Cell2 Plaster-in
Lamp	LED	
Lamp Power Luminaire lumens (4000K)	/6W 650lm	/9W 950lm
Driver	/STD Non Dimming	/DALI DALI Dimming
		/SDIM Switch Dimming
Colour Temperature	/830 3000k	/840 4000k
Bezel Colour	/WH White	/BK Black
Beam Angle Options	/22D 22 Degree	/36D 36 Degree
		/60D 60 Degree
Emergency	/RME3 Remote Three hour maintained emergency	/RME3-ST Remote Three hour maintained self test emergency
		/RME3-PRO Remote Three hour DALI addressable emergency
To Specify: MID ILS C3 Plaster-in 9W, 60 degree beam angle, 4000k, 950lm LED downlight, with an ILS bezel attachment; C3 in white with black trim. Part code: MID/ILS/9W/950lm/60D/STD/840/WH/BK/C3/PI		

