




**The MAGNETIC TRK SYSTEM is design to be compatible with the MAG TRK-15, MAG TRK-8, MAG-LINDA and the MAG-LINORA with the tracks and linears being able to attached on the same system.**

- Colours: Matt White or Matt Black (/WH/BK)
- The optimal rail connections is no more than 40 meters
- Connectors: See previous page for more details  
(/VIL/VEL/LL/TM/CS/HL) \* If required\*
- Compatible with any brand external 48V output constant voltage switching power supply
- Magnetic End Caps (/MC)
- Mountings: Plaster-in, Surface mounted, Wire Suspended or Rod Suspended (/P/SM/WS/RS)
- IP Rating: IP20
- Section View Dimensions: See image below
- Dimensions: Standard Magnetic Track Length - 0.5M, 1.0M, 1.5M or 2.0M
- Please contact technical department for more information

Product	MAG-TRK Magnetic Track System								
Dimensions	See image to the right								
Size Lengths	/0.5M		/1M		/1.5M		/2M		
Connectors *If required*	/LL	/HL		/VEL		/VIL		/TM	/CS
Colour	/WH White					/BK Black			
Mountings	/P Plaster-in		/SM Surface Mounted		/RS Rod Suspended		/WS Wire Suspended		
To Specify: Magnetic Track with 0.5M length, colour black, surface mounted with 2 Vertical inner L splicing and 2 Magnetic end caps. Part code: MAG-TRK/0.5M/2VIL/2MC/SM/BL									

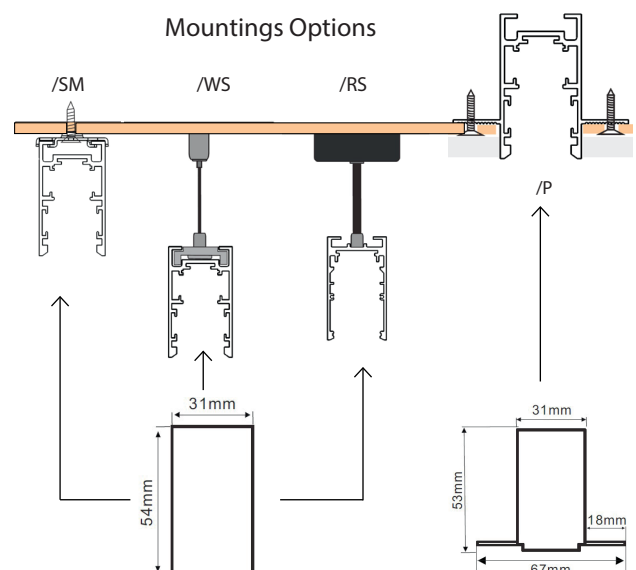


# MAGNETIC- TRK SYSTEM

## Connector Installations


Various connecting options for the  
Magnetic TRK solutions shown below.  
Designed for desired shape and size.

### Mountings


/P






/RS




/SM




/WS

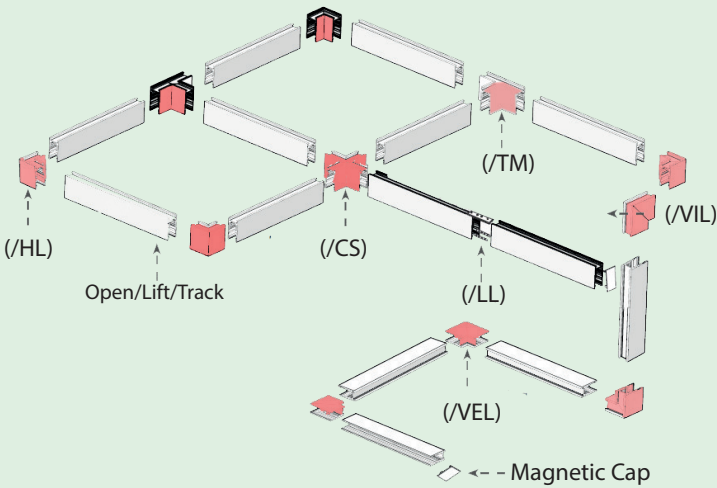


Vertical inner L splicing  
(/VIL)




Vertical external L  
splicing Installation (/VEL)




Linear Track line splice  
(/LL)

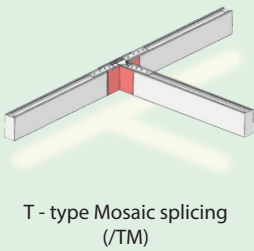

T - type Mosaic splicing  
(/TM)

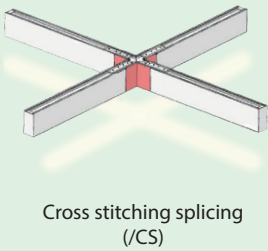

Cross stitching splicing  
(/CS)

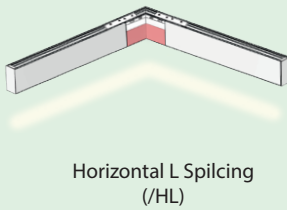

Horizontal L Splicing  
(/HL)