
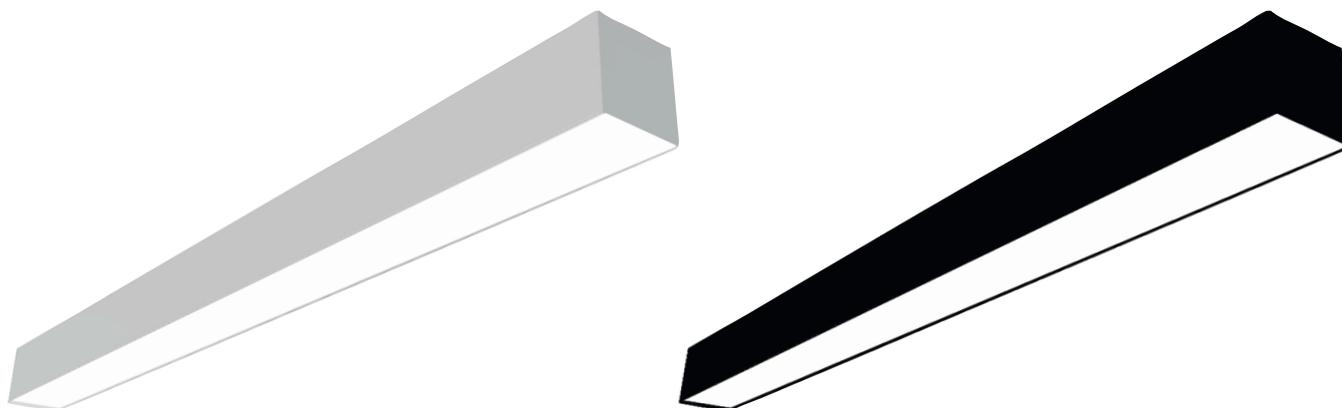


SPACELINE100



A high quality surface or suspended extruded system ideally suited for modular or continuous runs.

Surface & Suspended

- A range of low, standard and high lumen outputs
- Colour Temperatures: 3000k - 4000k - 5000k - TWH
- Colours: White RAL9016, White RAL9010, Black RAL9005, Anodic Silver as standard or other RAL colours available
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Distribution: Direct or Direct/Indirect options (/DL/UDL)
- Diffusers: Polar White or Micro Prismatic Optic (/PW/MPO)
- Aluminium extruded body
- A range of modular lengths available from 578-3595mm, available in continuous lengths to suit requirements
- Available in continuous runs with aluminium infills. Please contact our technical department for further details
- Nominal Dimensions: (Width x Height) 100 x 108.5mm

Product	MIS/SPL100 Surface or Suspended LED Linear			
LED Light Source	/LO Low Output	/SO Standard Output		/HO High Output
Lumens/m <small>Luminaire lumens (4000K)</small>	17.6W 1900lm/m	24.5W 2642lm/m		30.8W 3255lm/m
Lengths	/6 578mm	/9 859mm	/12 1139mm	/15 1420mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k	/840 4000k	/850 5000k	/TWH Tunable White
Colour	/WHRAL9016 White RAL9016	/WHRAL9010 White RAL9010	/BKRAL9005 Black RAL9005	/SLV Anodic Silver
Diffuser Options	/PW Polar White		/MPO Micro Prismatic Optic	
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour main- tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
To Specify: SPACELINE100 LED, Low Output, 1900lm per meter, 4000k, 1139mm long, LED modular suspended downlight finished white RAL9016 supplied complete with DALI control gear and polar white diffuser. Part code: MIS/SPL100/LO/1139/DALI/840/DL/12/WH9016/PW/WS				

Section View Dimensions

