
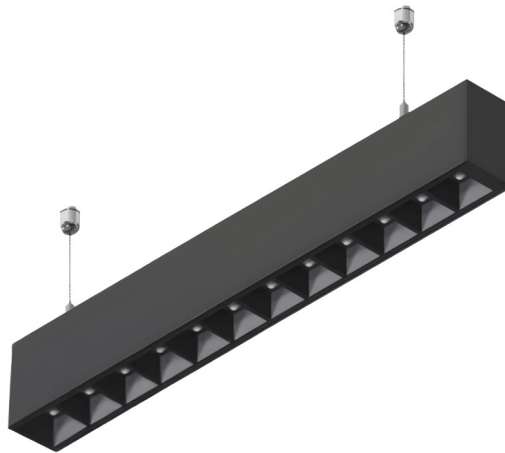


SPACELINE50-CELL



The SPACELINE50-CELL features recessed square optic modules set within deep anti-glare baffles, providing controlled, low-glare illumination, designed to support both ambient and feature lighting requirements.

- A range of lumen outputs from 603-1490lm
 - Colour Temperatures: 3000K - 4000K - 6500K - TWH
 - Beam Angles: 60° or 90° (/60D/90D)
 - Colour: White, Black and Silver as standard, other RAL colours available
 - Available with Dimming (/STD/DALI/SDIM)
 - Wireless Control (/WI) & Wireless Emergency (/ME3-WI)
 - Available with Emergency (/ME3/ME3-ST/ME3-PRO)
 - CRI90 as standard (/930/940/965)
 - Reflector Colour: White or Black (/WHR/BKR)
 - Dimensions: (Length x Width x Height)
 - /4CELL - 1125mm x 50mm x 75mm
 - /7CELL - 1405mm x 50mm x 75mm
 - Additional lengths are available to suit requirements
- **Note: Lumen figures below calculated using Black, 90° Reflector.

Product	MIS/SPL50 Surface LED Linear							
Light Source LED	/4-CELL 1125mm x 50mm x 75mm (L x W x H)				/7-CELL 1405mm x 50mm x 75mm (L x W x H)			
**System Power Luminaire lumens (4000K)	/4.9W 603lm	/7.1W 855lm	/8.6W 1017lm	/11.4W 1175lm	/4.6W 612lm	/6.8W 907lm	/9.1W 1202lm	/11.4W 1490lm
Driver	/STD Non Dimming		/DALI DALI Dimming		/SDIM Switch Dimming		/WI Wireless Control	
Colour Temperature	/930 3000k		/940 4000k		/965 6500k		/TWH Tunable White	
Colour	/WH White		/BK Black		/SLV Silver			
Beam Angle	/60D 60 Degrees				/90D 90 Degrees			
Reflector Colour	/WHR White Reflector				/BKR Black Reflector			
Emergency	/ME3 Three hour main- tained emergency		/ME3-ST Three hour main- tained self test emergency		/ME3-PRO Three hour DALI addressable emergency		/ME3-WI Three hour Wireless address- able emergency	
To Specify: MIS/SPL50 4-CELL, LED Linear, 4000K, 1017lm, 8.6W, LED linear surface finished black supplied complete with DALI control gear and 90° black reflector. Part code: MIS/SPL50/4CELL/8.6W/1017LM/DALI/840/BK/90D/BKR								

Overall Dimensions

