


SPACELINE50

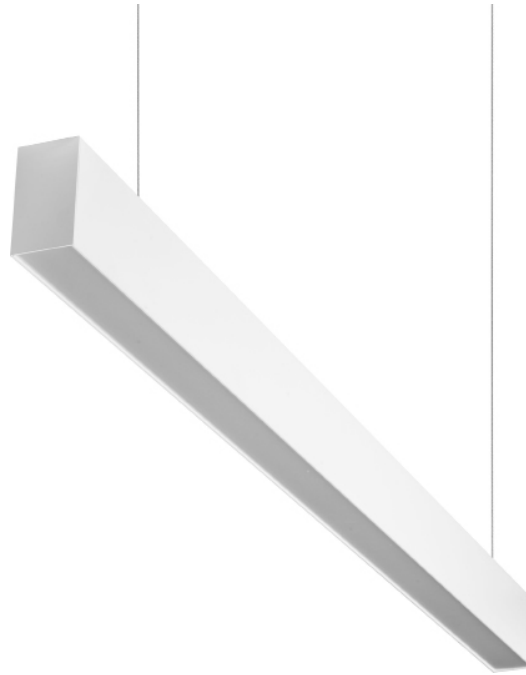

- A high quality surface or suspended extruded system ideally suited for modular or continuous runs.

- A range of lumen outputs from 2081-14019lm
- Colour Temperatures: 3000k - 4000k - 6000k
 - Aluminium extruded body
- White RAL9016, Black 9005 and Silver 9006 as standard, other RAL colours available
 - Diffuser Options: Polar White (/PW)
- Uplight option also available to specify (/UDL)
- Available with Dimming (/STD/DALI/SDIM)
- Available with integral Emergency (/ME3/ME3-ST/ME3-PRO)
- Available in continuous runs with aluminium infills. Please contact our technical department for further details
 - Nominal Dimensions: 1200 - 1500 x 50 x 85mm (LED)

Product	MIS/SPL50 Surface LED Linear			
Lamp	LED			
Lamp Power Luminaire lumens (4000K)	/19W 2081lm	/31W 3330lm	/24W 2605lm	/39W 4169lm
Size	/12 1200 x 50mm		/15 1500 x 50mm	
Driver	/STD Non Dimming	/DALI DALI Dimming		/SDIM Switch Dimming
Colour Temperature	/830 3000k	/840 4000k		/860 6000k
Colour	/WH White - RAL9016	/BK Black - RAL9005		/SLV Silver - RAL9006
Diffuser Options	/PW Polar White Diffuser			
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour maintained self test emergency		/ME3-PRO Three hour DALI addressable emergency
To Specify: SPACELINE50 LED, 39W, 4000k, 4169lm LED linear surface finished white supplied complete with DALI control gear and polar white diffuser. Part code: MIS/SPL50/LED/15/39W/4169lm/15/DALI/840/WH/PW				

