




- The STREETLED provides a highly efficiency and long-lasting alternative to HID exterior lights. Sealed to IP66 and provides a 5000k colour temperature source of light ideal for car parks, street lighting and other exterior applications.

- Providing a lumen output of 2710lm
- Colour Temperature: 5000k
- Die cast aluminium body
- Rated IP66
- LED sealed within impact resistant clear polycarbonate
- Supplied complete with integral LED driver
- Suits Ø86mm column mounts and secures onto Ø60mm spigot
- Dimensions: 646 x 242 x 87mm (L x W x D)

Product	MI/SLED-LITE Post top IP66 LED Luminaire
Lamp	LED
Lamp Power Luminaire lumens (5000K)	/36W 2710lm
Size	646 x 242mm
Driver	/STD Non Dimming
Colour Temperature	/850 5000k
Colour	/WH White
To Specify: STREETLED-LITE LED, 36W, 2710lm, 5000k, LED post top mounted luminaire finished white supplied with complete with standard integral control gear. Part code: MI/SLED-LITE/36W/2710lm/STD/850/WH	

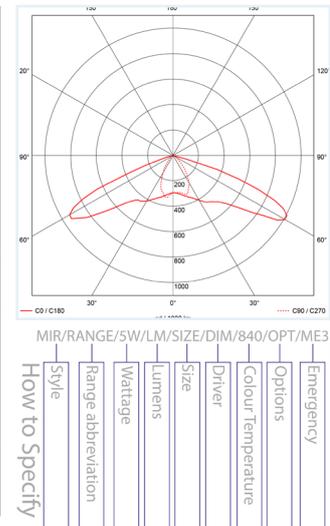



- The STREETLED provides a highly efficiency and long-lasting alternative to HID exterior lights. Sealed to IP66 and provides a 5000k colour temperature source of light ideal for car parks, street lighting and other exterior applications.

- Providing a lumen output of 5136-16453lm
- Colour Temperature: 5000k
- Die cast aluminium body
- Rated IP66
- LED sealed within impact resistant clear polycarbonate
- Supplied complete with integral LED driver
- Suits Ø86mm column mounts and secures onto Ø60mm spigot
- Dimensions: 629 x 315 x 77mm, 764 x 315 x 77mm (L x W x D)

Product	MI/SLED Post top IP66 LED Luminaire		
Lamp	LED		
Lamp Power Luminaire lumens (5000K)	/58W 5136lm	/120W 10272lm	/158W 16453lm
Size	629 x 315mm		764 x 315mm
Driver	/STD Non Dimming		
Colour Temperature	/850 5000k		
Colour	/WH White		
To Specify: STREETLED LED, 58W, 5136lm, 5000k, LED post top mounted luminaire finished white supplied with complete with standard integral control gear. Part code: MI/SLED/58W/5136lm/STD/850/WH			

