


Recessed


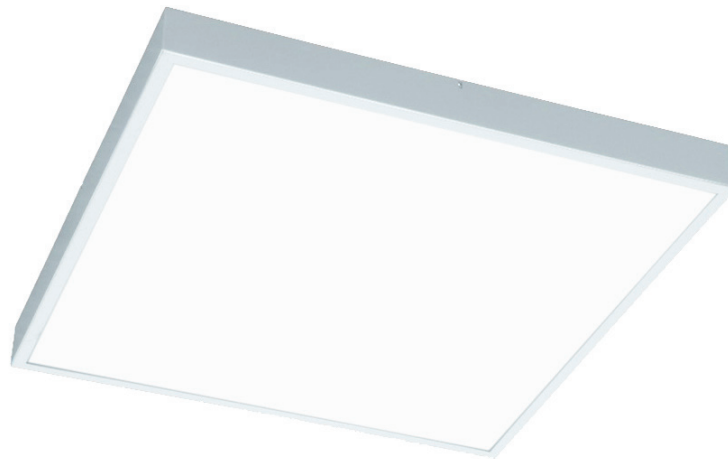


**An ultra low glare, high quality, backlit and efficient LED modular luminaire to suit most commercial ceiling types.**

**Part L compliant with a starting efficacy of 122.5 L.lm/cW.**

- A lumen output of 4951lm
- Colour Temperatures: 3000k - 4000k - 5000k - TWH
- Available with Dimming (/STD/DALI/SDIM)
- Wireless Control (/WI)
- Available with Emergency (/ME3/ME3-ST/ME3-PRO)
- Wireless Emergency (/ME3-WI)
- Suitable for exposed Tee ceilings, Spring Tee and other ceiling options available
- Diffuser: Micro Prismatic Optic & Lumeo Sheet (/MIC-LUM)
- IP Rating: IP40
- Depth with remote gear box 69mm.
- Dimensions: (Length x Width) 600 x 600mm
- Refer to page 120 & 121 for ceiling system options
- 5 year system warranty

Product	MIR/SUPREMELED Recessed SUPREMELED Modular			
Light Source	LED			
System Power <small>Luminaire lumens (4000K)</small>	/40.4W 4951lm			
Size (Nominal)	/66 600 x 600mm			
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/WI Wireless Control
Colour Temperature	/830 3000k	/840 4000k	/850 5000k	/TWH Tunable White
Colour	/WH White			
Diffuser Options	/MIC-LUM Micro Prismatic Optic & Lumeo Sheet			
Emergency	/ME3 Three hour main- tained emergency	/ME3-ST Three hour main- tained self test emergency	/ME3-PRO Three hour DALI addressable emergency	/ME3-WI Three hour Wireless addressable emergency
To Specify: SUPREMELED LED, 40.4W, 4000k, 4951lm LED modular recessed finished white supplied complete with DALI control gear and Micro Prismatic Optic & Lumeo Sheet diffuser. Part code: MIR/SUPREMELED/40.4W/4951lm/66/DALI/840/WH/MIC-LUM				




## Ceiling System Options

### General Features


MID Lighting are able to offer recessing brackets for a variety of different sizes and ceiling tile styles for the range of recessed luminaires. We have successfully designed, manufactured and supplied these brackets to a multitude of projects, including W5 Regent Street, South Thames College and many more projects.

### Exposed Tee


The most common ceiling system available in 15mm or 24mm widths with other widths available. Please ensure the correct tee width and height is specified as different manufacturers supply different height tee sections. Luminaires are generally designed to lift & tilt onto the exposed tee bar but other support methods including side arm brackets or drop rods can also be specified if required.




Typical 24mm Tee




Typical 15mm Tee




Ecophon Focus Ebx




Armstrong Prelude  
24 Sixty




Armstrong Prelude  
15




Armstrong T35




SAS 130 Alugrid  
Q15/08



SAS 130 Alugrid  
Q15/16



SAS 130 Alugrid  
Q26/16




Armstrong Prelude  
Silhouette XL-XT 15T

### Concealed Tee

A ceiling system where the ceiling tile hides all tee supports. Semi concealed systems are also available which use a main exposed tee bar with concealed cross noggin bars. Please ensure the correct tee width and height is specified as different manufacturers supply different height tee sections.


Luminaires are generally designed to fit within the tile aperture and supported via side arm brackets on the tee bar but other support methods including drop rods can also be specified if required.

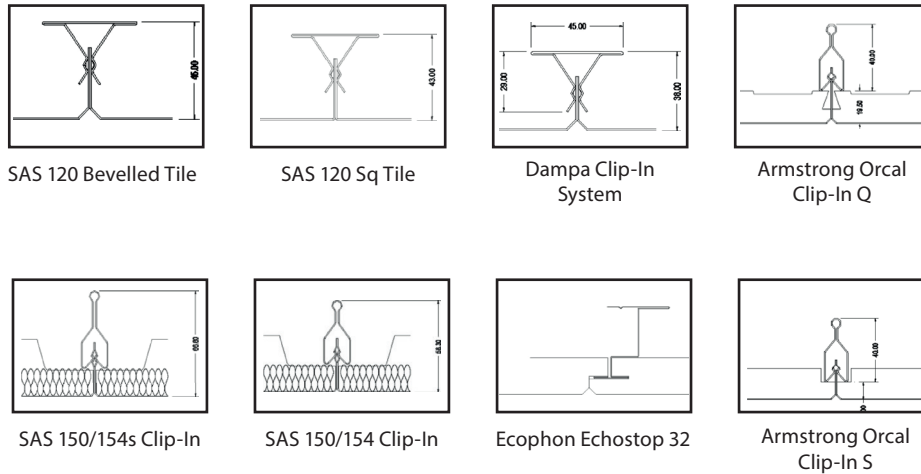

### Plank ceilings & Luminaire Positioning Options

Linear ceiling tiles supported from each end only by the main tile support beam. Please ensure the correct width and height is specified as different manufacturers supply different height sections. Luminaires are generally designed to lift & tilt onto the exposed tee bar but other support methods including side arm brackets or drop rods can also be specified if required.

Luminaires generally fit within the ceiling system in one of three possible ways and the installation options are dependant upon the ceiling system and tile style being used. Floating luminaire: The luminaire fits within the tile aperture and supported via side arm brackets. This option is usually preferred when a regular tile is being used. Overlapping luminaire: The luminaire trim overlaps the ceiling trim on the underside and is supported via side arm brackets. Lay-In luminaire: The most common method used with exposed tee ceiling systems. The luminaire rests directly on the tee bar removing the need for any the need for additional support brackets.

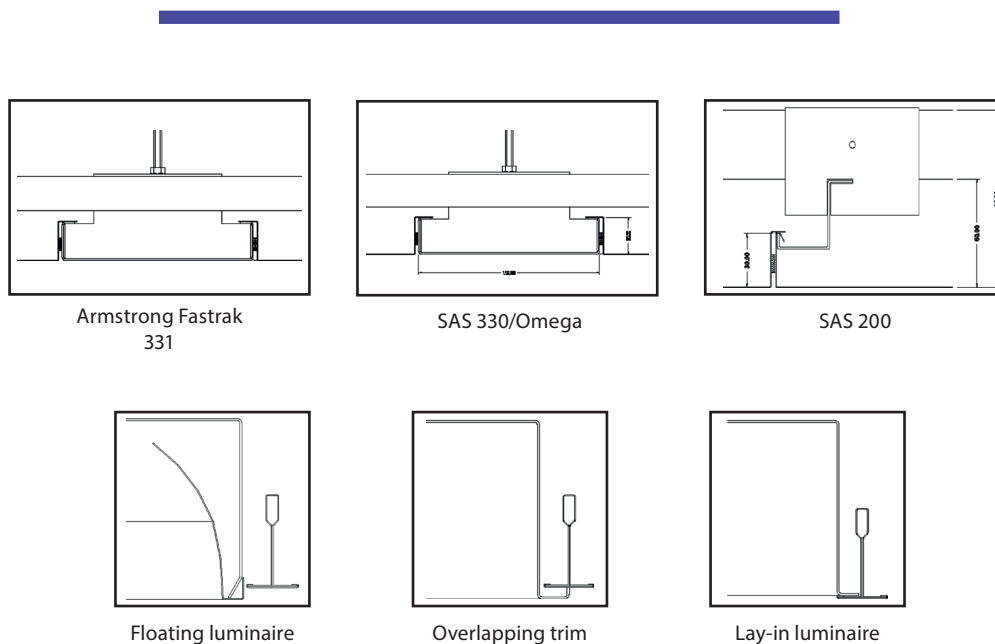

### Plasterboard

Plasterboard ceilings are self explanatory. An aperture is cut into the plasterboard and lined with wooden battens to locate and support each luminaire. The luminaire is retained within the aperture via side arm brackets or directly screw fixed with its overlapping trim hiding the aperture cut.