


WAFER-SQ SURFACE

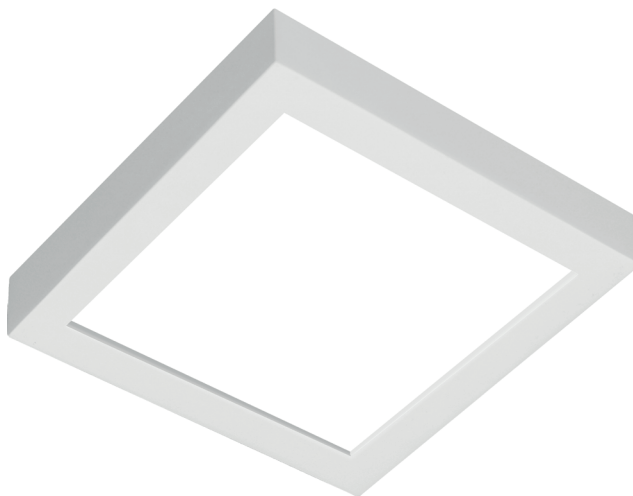

An architectural, square, ultra shallow LED solution. Surface; ideal for restricted ceiling heights.

- A range of lumen outputs from 461-2174lm
- Colour Temperatures: 3000k - 4000k
- Colours: White (/WH)
- Available with Dimming (/STD/DALI/SDIM/MDIM)
- Wireless Control (/WI)
- Available with Emergency (/RME3 /RME3-ST/RME3-PRO)
- Wireless Emergency (/RME3-WI)
- Diffuser: Opal
- Dimensions: (Length x Width)
See table below
- Shallow Depth: 39mm
- Please note: 30W version has integral emergency

Product	MIS/WAF-SQ Surface WAFER Square				
Light Source	LED				
System Power Luminaire lumens (4000K)	/8W 461lm	/15W 982lm	/22W 1656lm	/30W 2174lm	
Size Depth = 39mm	108mm x 108mm	168mm x 168mm	220mm x 220mm	300mm x 300mm	
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000k			/840 4000k	
Bezel Colour	/WH White				
Diffuser Options	/OP Opal Diffuser				
Emergency	/RME3 Remote three hour maintained emer- gency	/RME3-ST Remote three hour maintained self test emergency	/RME3-PRO Remote three hour DALI addressable emergency	/RME3-WI Remote three hour Wireless addressable emergency	
To Specify: WAFER SQUARE LED, 15W, 4000k, 982lm LED surface downlight finished white and a opal diffuser complete DALI control gear. Part code: MIS/WAF-SQ/15W/982lm/DALI/840/WH/OP					

