

WAFER C RECESSED


EMERGENCY
OPTIONS

DALI

See below

IP20

MID
MARLOW INTEGRATED DESIGNS

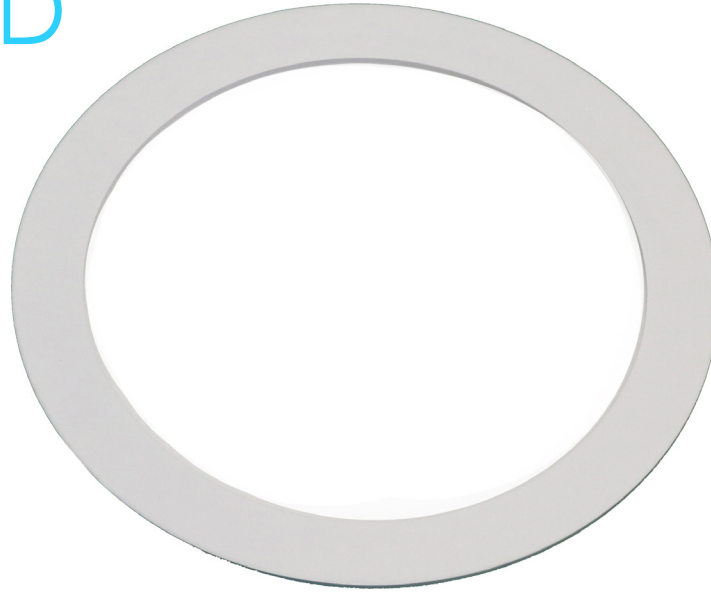

- The WAFER circular is an architectural, circular, ultra shallow LED solution.

- Recessed; ideal for restricted ceiling heights and voids

- Available in 8W (Ø 117mm), 11W (Ø 180mm) 15W (Ø 240mm), 22W (Ø 240mm) & 30W (Ø 300mm)

Circular: 537/827/982/1556/1997 lumens

- Shallow Depth: 19mm (depth without driver, driver depth may vary)

- Available with Dimming (/STD/DALI/SDIM/MDIM)

- Colour Temperatures: 3000k - 4000k - 6500k

- Bezel Options: White or Silver (/WH/SLV)

- Available with remote Emergency (/RME3/RME3-ST/RME3-PRO)

Product	MIR/WAF/C Recessed WAFER Circular			
Lamp	LED			
Lamp Power Luminaire lumens (4000K)	/8W 537lm	/11W 827lm	/15W / /22W 1118lm / 1556lm	/30W 1997lm
Size Cutout	117mm 108mm	180mm 165mm	240mm 225mm	300mm 282mm
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming
Colour Temperature	/830 3000k	/840 4000k		/865 6500k
Bezel Colour	/WH White		/SLV Silver	
Diffuser Options	/OP Opal Diffuser			
Emergency	/RME3 Remote Three hour maintained emergency	/RME3-ST Remote three hour maintained self test emergency		/RME3-PRO Remote Three hour DALI addressable emergency
To Specify: WAFER LED, 15W, 4000k, 1118lm LED downlight finished silver supplied complete with remote control gear and wishbone spring retainers. Part code: MIR/WAF/C/15W/1118lm/STD/840/SLV/OP				

