


WAFER-SQ SURFACE 66



An architectural, surface, square ultra shallow LED solution. Surface; ideal for restricted ceiling heights.

- A lumen output of 3180lm
- Colour Temperatures: 3000k - 4000k
- Available with Dimming (/STD/DALI/SDIM/MDIM)
- Wireless Control (/WI)
- Available with remote Emergency (/RME3/RME3-ST /RME3-PRO)
- Wireless Emergency (/RME3-WI)
- Bezel Options: White (/WH)
- Diffuser Options: Opal (/OP)
- Dimensions: (Length x Width x Height)
600 x 600 x 48mm

Product	MIS/WAF-SQ Surface WAFER Square 600x600				
Light Source	LED				
System Power Luminaire lumens (4000K)	/40W 3180lm				
Size	/66 600mm x 600mm				
Driver	/STD Non Dimming	/DALI DALI Dimming	/SDIM Switch Dimming	/MDIM Mains Dimming	/WI Wireless Control
Colour Temperature	/830 3000k		/840 4000k		/865 6500k
Bezel Colour	/WH White				
Diffuser Options	/OP Opal Diffuser				
Emergency	/RME3 Remote three hour maintained emer- gency	/RME3-ST Remote three hour maintained self test emergency	/RME3-PRO Remote three hour DALI addressable emergency	/RME3-WI Remote three hour Wireless addressable emergency	
To Specify: WAFER-SQ/66 LED, 40W, 4000k, 3180lm LED surface luminaire finished white supplied complete with remote DALI control gear. Part code: MIS/WAF-SQ/40W/3180lm/66/DALI/840/WH/OP					

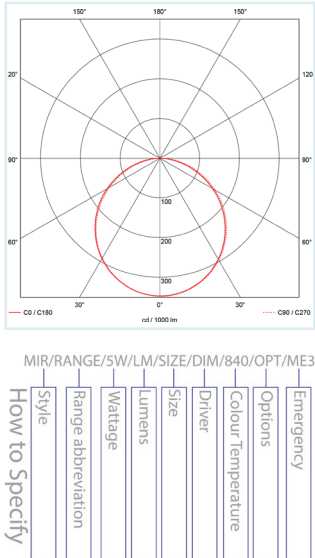

WAFER INSTALLATIONS



Throws Farm



Wood Bridge Care Home



MBNA Thames Clipper